


YKK

高压三相异步电动机 (6~10KV)

YKK Series High Voltage Three Phase Asynchronous Motor (6~10KV)

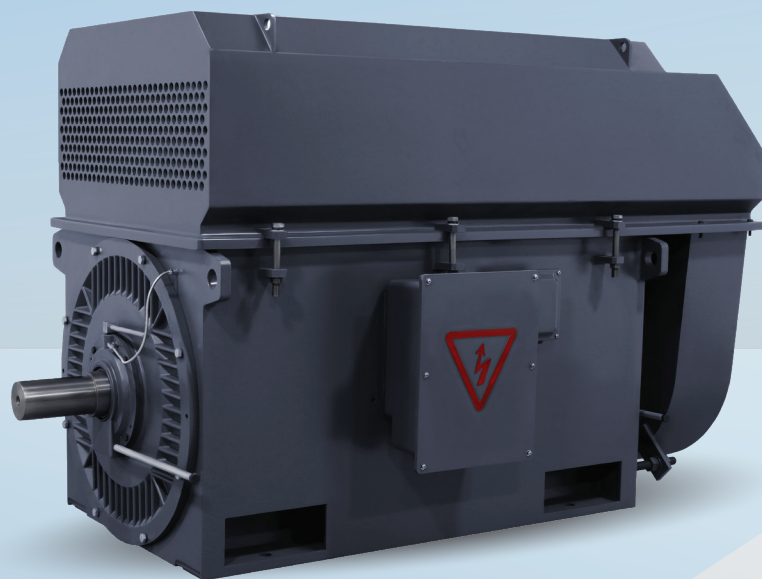

YKK系列高压三相异步电动机为封闭式笼型转子三相异步电动机,是按JB/T 12730-2016《YKK、YXKK系列高压三相异步电动机技术条件及能效分级(机座号355~630)》生产的,该系列电机防护等级为IP44或IP54,冷却方式为IC611,绝缘等级为F级,额定电压为6~10KV,该系列电机采用箱式结构,重量轻,刚性好,具有效率高、噪音低、振动小、质量可靠、安装维修方便等优点,可广泛用于电站、水厂、石化冶金、矿山等行业。

YKK series high voltage three phase asynchronous motor is enclosed squirrel-cage three phase asynchronous motor. It is produced according to the the standard of JB/T 12730-2016 "Technical Conditions and Energy Efficiency Classification (Frame No. 355~630) of YKK and YXKK series high voltage three phase asynchronous motor ". The protection degree of the motor is IP44/IP54 and the cooling method is IC611. Its insulation class is F and the rated voltage is 6~10KV. This series motor adopts box structure, with the advantages of light weight, good rigidity, high efficiency, low noise, low vibration, reliable performance and easy installation and maintenance. It is widely used in various industries such as power station, waterworks, petrification, metallurgy and mine.


产品型号示例 Sample Product Model

YKK 4501 — 4

极数:4极
Pole count: 4 poles

规格代号。表示中心高450mm,1号铁芯长
Specification code:450mm high, No.1 iron core length

产品代号,表示封闭带空-空冷却器的笼型转子异步电动机
Product code: for cage-type rotor asynchronous motor with closed air-to-air cooler

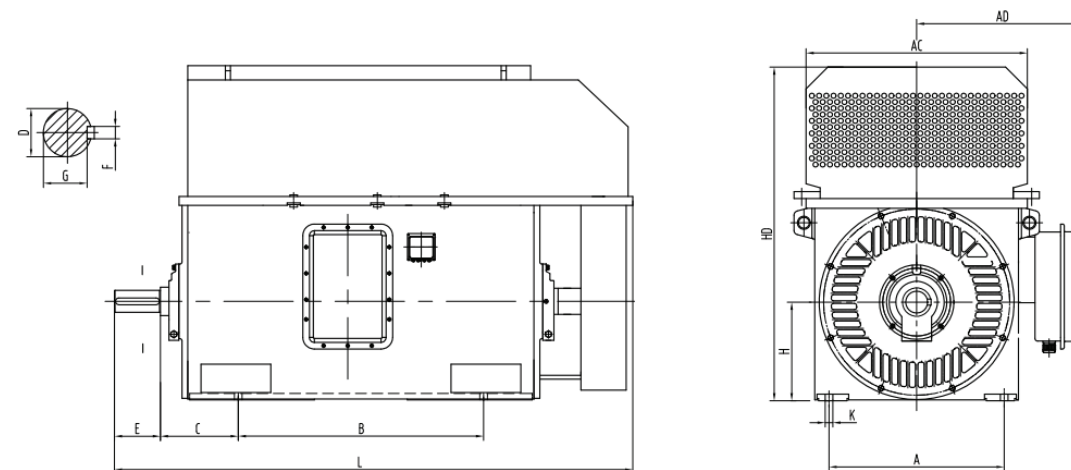

机座号 Frame Size	级数 Pole	安装尺寸Mounting Dimensions(mm)									外形尺寸Overall Dimensions(mm)				
		A	B	C	D	E	F	G	H	K	AC	AD	HD	L	
355	2	630	900	315	80	170	22	71	355	28	1120	1020	1500	2450	
	4, 6				100	210	28	90							
400	2	710	1000	375	90	170	25	81	400	35	1260	1050	1700	2600	
	4, 6			335	110	210	28	100							
450	2	800	1120	400	100	210	28	81	450	35	1420	1120	1900	2900	
	4			335	120		32	100							
	6, 8, 10			130	250		32	100							
500	2	900	1250	560	110	210	28	90	500	42	1600	1200	2200	3300	
	4			475	130		250	32							119
	6, 8, 10			140	300		36	138							
560	2	1000	1400	560	130	250	32	119	560	42	1800	1260	2400	3550	
	4			500	150		36	147							
	6, 8, 10			160	300		40	165							
630	2	1120	1600	560	140	250	36	128	630	48	2000	1360	2720	3800	
	4			530	170		40	157							
	6, 8, 10			180	300		45	165							

注:若有特殊要求,可按用户需求提供。 Please contact us with your requirement.

6KV 技术数据 Technical Data

型号 Type	功率 Output (kW)	额定转速 Rated Speed (r/min)	电流 Current (A)	电压 Voltage (V)	效率 Efficiency (%)	功率因数 COSΦ	堵转转矩 额定转矩 Tst/Tn	堵转电流 额定电流 Ist/In	最大转矩 额定转矩 Tm/Tn	重量 Weight (kg)
YKK3553-2	220	2980	27.16	6000	91.7	0.85	0.6	7.0	1.8	2470
YKK3554-2	250	2980	30.83	6000	91.8	0.85	0.6	7.0	1.8	2700
YKK3555-2	280	2980	34.45	6000	92	0.85	0.6	7.0	1.8	2730
YKK3556-2	315	2980	38.59	6000	92.4	0.85	0.6	7.0	1.8	2750
YKK3551-4	185	1490	22.79	6000	91.9	0.85	0.7	6.5	1.8	2280
YKK3552-4	200	1490	24.58	6000	92.1	0.85	0.7	6.5	1.8	2330
YKK3553-4	220	1490	27.01	6000	92.2	0.85	0.7	6.5	1.8	2390
YKK3554-4	250	1490	30.66	6000	92.3	0.85	0.7	6.5	1.8	2450
YKK3555-4	280	1490	33.91	6000	92.4	0.86	0.7	6.5	1.8	2500
YKK3556-4	315	1490	38.06	6000	92.6	0.86	0.7	6.5	1.8	2570
YKK3553-6	185	990	23.73	6000	91.5	0.82	0.7	6.0	1.8	2180
YKK3554-6	200	990	25.57	6000	91.8	0.82	0.7	6.0	1.8	2250
YKK3555-6	220	990	28.06	6000	92	0.82	0.7	6.0	1.8	2340
YKK3556-6	250	990	31.82	6000	92.2	0.82	0.7	6.0	1.8	2420
YKK4001-2	355	2980	42.85	6000	92.7	0.86	0.6	7.0	1.8	3540
YKK4002-2	400	2980	48.13	6000	93	0.86	0.6	7.0	1.8	3570
YKK4003-2	450	2980	53.97	6000	93.3	0.86	0.6	7.0	1.8	3590
YKK4004-2	500	2980	59.77	6000	93.6	0.86	0.6	7.0	1.8	3620
YKK4005-2	560	2980	66.80	6000	93.8	0.86	0.6	7.0	1.8	3670
YKK4001-4	355	1490	42.80	6000	92.8	0.86	0.7	6.5	1.8	3920
YKK4002-4	400	1490	48.13	6000	93	0.86	0.7	6.5	1.8	4050
YKK4003-4	450	1490	54.03	6000	93.2	0.86	0.7	6.5	1.8	4160
YKK4004-4	500	1490	59.90	6000	93.4	0.86	0.7	6.5	1.8	4250
YKK4005-4	560	1490	66.94	6000	93.6	0.86	0.7	6.5	1.8	4370
YKK4002-6	280	990	35.52	6000	92.5	0.82	0.7	6.0	1.8	3950
YKK4003-6	315	990	39.83	6000	92.8	0.82	0.7	6.0	1.8	4060
YKK4004-6	355	990	44.26	6000	93	0.83	0.7	6.0	1.8	4100
YKK4005-6	400	990	49.81	6000	93.1	0.83	0.7	6.0	1.8	4180
YKK4001-8	185	740	24.92	6000	91.6	0.78	0.8	5.5	1.8	3830
YKK4002-8	200	740	26.85	6000	91.9	0.78	0.8	5.5	1.8	3890
YKK4003-8	220	740	29.47	6000	92.1	0.78	0.8	5.5	1.8	3940
YKK4004-8	250	740	33.03	6000	92.2	0.79	0.8	5.5	1.8	3990
YKK4005-8	280	740	36.91	6000	92.4	0.79	0.8	5.5	1.8	4040
YKK4004-10	185	590	26.14	6000	90.8	0.75	0.8	5.5	1.8	3800
YKK4005-10	200	590	28.17	6000	91.1	0.75	0.8	5.5	1.8	3940
YKK4502-2	630	2980	74.13	6000	94	0.87	0.6	7.0	1.8	4300
YKK4503-2	710	2980	83.45	6000	94.1	0.87	0.6	7.0	1.8	4360
YKK4504-2	800	2980	93.83	6000	94.3	0.87	0.6	7.0	1.8	4430
YKK4505-2	900	2980	105.34	6000	94.5	0.87	0.6	7.0	1.8	4500
YKK4502-4	630	1490	75.15	6000	93.8	0.86	0.7	6.5	1.8	4530
YKK4503-4	710	1490	84.51	6000	94	0.86	0.7	6.5	1.8	4680
YKK4504-4	800	1490	93.83	6000	94.3	0.87	0.7	6.5	1.8	4800
YKK4505-4	900	1490	105.45	6000	94.4	0.87	0.7	6.5	1.8	4910
YKK4502-6	450	990	55.86	6000	93.4	0.83	0.7	6.0	1.8	4470
YKK4503-6	500	990	61.87	6000	93.7	0.83	0.7	6.0	1.8	4600
YKK4504-6	560	990	68.39	6000	93.8	0.84	0.7	6.0	1.8	4740
YKK4505-6	630	990	76.86	6000	93.9	0.84	0.7	6.0	1.8	4880
YKK4502-8	315	740	41.39	6000	92.7	0.79	0.8	5.5	1.8	4330
YKK4503-8	355	740	46.60	6000	92.8	0.79	0.8	5.5	1.8	4460
YKK4504-8	400	740	51.74	6000	93	0.8	0.8	5.5	1.8	4590
YKK4505-8	450	740	58.14	6000	93.1	0.8	0.8	5.5	1.8	4710
YKK4501-10	220	590	30.92	6000	91.3	0.75	0.8	5.5	1.8	4210
YKK4502-10	250	590	35.06	6000	91.5	0.75	0.8	5.5	1.8	4280
YKK4503-10	280	590	39.18	6000	91.7	0.75	0.8	5.5	1.8	4520
YKK4504-10	315	590	43.31	6000	92.1	0.76	0.8	5.5	1.8	4700
YKK4505-10	355	590	48.70	6000	92.3	0.76	0.8	5.5	1.8	4950
YKK5002-2	1000	2980	116.9	6000	94.6	0.87	0.6	7.0	1.8	5510

型号 Type	功率 Output (kW)	额定转速 Rated Speed (r/min)	电流 Current (A)	电压 Voltage (V)	效率 Efficiency (%)	功率因数 COSΦ	堵转转矩 额定转矩 Tst/Tn	堵转电流 额定电流 Ist/In	最大转矩 额定转矩 Tm/Tn	重量 Weight (kg)
YKK5003-2	1120	2980	130.8	6000	94.7	0.87	0.6	7.0	1.8	5710
YKK5004-2	1250	2980	145.7	6000	94.9	0.87	0.6	7.0	1.8	5910
YKK5005-2	1400	2980	161.1	6000	95	0.88	0.6	7.0	1.8	6120
YKK5002-4	1000	1490	117.0	6000	94.5	0.87	0.7	6.5	1.8	6020
YKK5003-4	1120	1490	131.0	6000	94.6	0.87	0.7	6.5	1.8	6240
YKK5004-4	1250	1490	144.2	6000	94.8	0.88	0.7	6.5	1.8	6460
YKK5005-4	1400	1490	161.3	6000	94.9	0.88	0.7	6.5	1.8	6670
YKK5002-6	710	990	86.34	6000	94.2	0.84	0.7	6.0	1.8	5810
YKK5003-6	800	990	97.08	6000	94.4	0.84	0.7	6.0	1.8	6010
YKK5004-6	900	990	107.8	6000	94.5	0.85	0.7	6.0	1.8	6220
YKK5005-6	1000	990	119.7	6000	94.6	0.85	0.7	6.0	1.8	6410
YKK5002-8	500	740	64.25	6000	93.6	0.8	0.8	5.5	1.8	5600
YKK5003-8	560	740	71.81	6000	93.8	0.8	0.8	5.5	1.8	5780
YKK5004-8	630	740	78.73	6000	93.9	0.82	0.8	5.5	1.8	5900
YKK5005-8	710	740	88.64	6000	94	0.82	0.8	5.5	1.8	6010
YKK5001-10	400	590	54.69	6000	92.6	0.76	0.8	5.5	1.8	5540
YKK5002-10	450	590	61.46	6000	92.7	0.76	0.8	5.5	1.8	5700
YKK5003-10	500	590	66.33	6000	93	0.78	0.8	5.5	1.8	5900
YKK5004-10	560	590	74.21	6000	93.1	0.78	0.8	5.5	1.8	6070
YKK5005-10	630	590	83.39	6000	93.2	0.78	0.8	5.5	1.8	6250
YKK5601-2	1600	2980	184.0	6000	95.1	0.88	0.6	7.0	1.8	7100
YKK5602-2	1800	2980	206.8	6000	95.2	0.88	0.6	7.0	1.8	7500
YKK5603-2	2000	2980	229.2	6000	95.4	0.88	0.6	7.0	1.8	7800
YKK5601-4	1600	1490	184.2	6000	95	0.88	0.6	6.5	1.8	9050
YKK5602-4	1800	1490	207.0	6000	95.1	0.88	0.6	6.5	1.8	9900
YKK5603-4	2000	1490	229.5	6000	95.3	0.88	0.6	6.5	1.8	10800
YKK5601-6	1120	990	133.9	6000	94.7	0.85	0.7	6.5	1.8	7900
YKK5602-6	1250	990	147.4	6000	94.9	0.86	0.7	6.5	1.8	8750
YKK5603-6	1400	990	164.9	6000	95	0.86	0.7	6.5	1.8	9400
YKK5601-8	800	740	99.66	6000	94.2	0.82	0.7	6.0	1.8	7300
YKK5602-8	900	740	109.3	6000	94.3	0.84	0.7	6.0	1.8	7520
YKK5603-8	1000	740	121.4	6000	94.4	0.84	0.7	6.0	1.8	7740
YKK5601-10	710	590	93.78	6000	93.4	0.78	0.7	6.0	1.8	8300
YKK5602-10	800	590	102.7	6000	93.7	0.8	0.7	6.0	1.8	8450
YKK5603-10	900	590	115.4	6000	93.8	0.8	0.7	6.0	1.8	8570
YKK6302-2	2240	2980	256.5	6000	95.5	0.88	0.6	7.0	1.8	9800
YKK6304-2	2500	2980	286.0	6000	95.6	0.88	0.6	7.0	1.8	10020
YKK6306-2	2800	2980	320.3	6000	95.6	0.88	0.6	7.0	1.8	10240
YKK6308-2	3150	2980	359.9	6000	95.7	0.88	0.6	7.0	1.8	10500
YKK6302-4	2240	1490	256.8	6000	95.4	0.88	0.6	6.5	1.8	13100
YKK6304-4	2500	1490	286.3	6000	95.5	0.88	0.6	6.5	1.8	14050
YKK6306-4	2800	1490	320.3	6000	95.6	0.88	0.6	6.5	1.8	15000
YKK6308-4	3150	1490	359.6	6000	95.8	0.88	0.6	6.5	1.8	15800
YKK6304-6	1600	990	188.3	6000	95.1	0.86	0.7	6.5	1.8	10250
YKK6305-6	1800	990	211.6	6000	95.2	0.86	0.7	6.5	1.8	11000
YKK6306-6	2000	990	234.6	6000	95.4	0.86	0.7	6.5	1.8	11900
YKK6308-6	2240	990	262.5	6000	95.5	0.86	0.7	6.5	1.8	12850
YKK6304-8	1120	740	135.8	6000	94.5	0.84	0.7	6.0	1.8	9080
YKK6305-8	1250	740	151.2	6000	94.7	0.84	0.7	6.0	1.8	9480
YKK6306-8	1400	740	169.2	6000	94.8	0.84	0.7	6.0	1.8	9800
YKK6307-8	1600	740	193.1	6000	94.9	0.84	0.7	6.0	1.8	10230
YKK6308-8	1800	740	217.1	6000	95	0.84	0.7	6.0	1.8	10600
YKK6304-10	1000	590	128.1	6000	93.9	0.8	0.7	6.0	1.8	9850
YKK6305-10	1120	590	143.2	6000	94.1	0.8	0.7	6.0	1.8	10400
YKK6306-10	1250	590	159.3	6000	94.4	0.8	0.7	6.0	1.8	11800
YKK6307-10	1400	590	178.2	6000	94.5	0.8				

10KV 技术数据 Technical Data

型号 Type	功率 Output (kW)	额定转速 Rated Speed (r/min)	电流 Current (A)	电压 Voltage (V)	效率 Efficiency (%)	功率因数 COSΦ	堵转转矩 额定转矩 Tst/Tn	堵转电流 额定电流 Ist/In	最大转矩 额定转矩 Tm/Tn	重量 Weight (kg)
YKK4001-2	220	2980	16.31	10000	91.6	0.85	0.6	7.0	1.8	3410
YKK4002-2	250	2980	18.50	10000	91.8	0.85	0.6	7.0	1.8	3420
YKK4003-2	280	2980	20.65	10000	92.1	0.85	0.6	7.0	1.8	3470
YKK4004-2	315	2980	23.16	10000	92.4	0.85	0.6	7.0	1.8	3510
YKK4005-2	355	2980	25.68	10000	92.8	0.86	0.6	7.0	1.8	3540
YKK4006-2	400	2980	28.84	10000	93.1	0.86	0.6	7.0	1.8	3570
YKK4001-4	220	1490	16.74	10000	91.4	0.83	0.7	7.0	1.8	3670
YKK4002-4	250	1490	18.99	10000	91.6	0.83	0.7	7.0	1.8	3710
YKK4003-4	280	1490	21.22	10000	91.8	0.83	0.7	7.0	1.8	3780
YKK4004-4	315	1490	23.79	10000	92.1	0.83	0.7	7.0	1.8	3845
YKK4005-4	355	1490	25.82	10000	92.3	0.86	0.7	7.0	1.8	3920
YKK4006-4	400	1490	29.03	10000	92.5	0.86	0.7	7.0	1.8	4050
YKK4004-6	220	990	17.41	10000	91.2	0.8	0.7	6.0	1.8	3860
YKK4005-6	250	990	19.74	10000	91.4	0.8	0.7	6.0	1.8	3900
YKK4006-6	280	990	22.04	10000	91.7	0.8	0.7	6.0	1.8	3950
YKK4501-2	450	2980	32.38	10000	93.3	0.86	0.6	7.0	1.8	4050
YKK4502-2	500	2980	35.94	10000	93.4	0.86	0.6	7.0	1.8	4300
YKK4503-2	560	2980	40.17	10000	93.6	0.86	0.6	7.0	1.8	4500
YKK4504-2	630	2980	44.62	10000	93.7	0.87	0.6	7.0	1.8	4680
YKK4505-2	710	2980	50.23	10000	93.8	0.87	0.6	7.0	1.8	4870
YKK4501-4	450	1490	32.52	10000	92.9	0.86	0.7	7.0	1.8	4500
YKK4502-4	500	1490	36.09	10000	93	0.86	0.7	7.0	1.8	4920
YKK4503-4	560	1490	40.30	10000	93.3	0.86	0.7	7.0	1.8	5100
YKK4504-4	630	1490	45.24	10000	93.5	0.86	0.7	7.0	1.8	5500
YKK4505-4	710	1490	50.66	10000	94.1	0.86	0.7	7.0	1.8	5800
YKK4501-6	315	990	24.11	10000	92	0.82	0.7	6.0	1.8	4570
YKK4502-6	355	990	26.78	10000	92.2	0.83	0.7	6.0	1.8	4600
YKK4503-6	400	990	30.11	10000	92.4	0.83	0.7	6.0	1.8	4670
YKK4504-6	450	990	33.80	10000	92.6	0.83	0.7	6.0	1.8	4720
YKK4505-6	500	990	37.40	10000	93	0.83	0.7	6.0	1.8	4800
YKK4502-8	220	740	18.59	10000	91.1	0.75	0.7	6.0	1.8	4020
YKK4503-8	250	740	21.08	10000	91.3	0.75	0.7	6.0	1.8	4110
YKK4504-8	280	740	23.22	10000	91.6	0.76	0.7	6.0	1.8	4200
YKK4505-8	315	740	25.67	10000	92	0.77	0.7	6.0	1.8	4330
YKK4505-10	220	590	19.39	10000	91	0.72	0.7	5.5	1.8	4210
YKK5003-2	800	2980	56.48	10000	94	0.87	0.6	7.0	1.8	6300
YKK5004-2	900	2980	63.47	10000	94.1	0.87	0.6	7.0	1.8	6450
YKK5005-2	1000	2980	70.45	10000	94.2	0.87	0.6	7.0	1.8	6580
YKK5006-2	1120	2980	78.74	10000	94.4	0.87	0.6	7.0	1.8	6720
YKK5003-4	800	1490	56.30	10000	94.3	0.87	0.7	7.0	1.8	6070
YKK5004-4	900	1490	63.27	10000	94.4	0.87	0.7	7.0	1.8	6630
YKK5005-4	1000	1490	70.23	10000	94.5	0.87	0.7	7.0	1.8	6900
YKK5006-4	1120	1490	78.57	10000	94.6	0.87	0.7	7.0	1.8	7150
YKK5002-6	560	990	41.26	10000	93.3	0.84	0.7	6.0	1.8	6120
YKK5003-6	630	990	46.26	10000	93.6	0.84	0.7	6.0	1.8	6680
YKK5004-6	710	990	52.03	10000	93.8	0.84	0.7	6.0	1.8	6900
YKK5005-6	800	990	58.50	10000	94	0.84	0.7	6.0	1.8	7210
YKK5006-6	900	990	64.90	10000	94.2	0.85	0.7	6.0	1.8	7500
YKK5001-8	355	740	28.81	10000	92.4	0.77	0.7	6.0	1.8	5770
YKK5002-8	400	740	32.01	10000	92.5	0.78	0.7	6.0	1.8	5830

型号 Type	功率 Output (kW)	额定转速 Rated Speed (r/min)	电流 Current (A)	电压 Voltage (V)	效率 Efficiency (%)	功率因数 COSΦ	堵转转矩 额定转矩 Tst/Tn	堵转电流 额定电流 Ist/In	最大转矩 额定转矩 Tm/Tn	重量 Weight (kg)
YKK5003-8	450	740	35.93	10000	92.7	0.78	0.7	6.0	1.8	6370
YKK5004-8	500	740	39.25	10000	93.1	0.79	0.7	6.0	1.8	6600
YKK5005-8	560	740	43.87	10000	93.3	0.79	0.7	6.0	1.8	6940
YKK5006-8	630	740	47.29	10000	93.8	0.82	0.7	6.0	1.8	7120
YKK5001-10	250	590	21.98	10000	91.2	0.72	0.7	5.5	1.8	5940
YKK5002-10	280	590	23.88	10000	91.5	0.74	0.7	5.5	1.8	6130
YKK5003-10	315	590	26.80	10000	91.7	0.74	0.7	5.5	1.8	6200
YKK5004-10	355	590	29.67	10000	92.1	0.75	0.7	5.5	1.8	6280
YKK5005-10	400	590	33.36	10000	92.3	0.75	0.7	5.5	1.8	6350
YKK5006-10	450	590	36.96	10000	92.5	0.76	0.7	5.5	1.8	6420
YKK5602-2	1250	2980	87.69	10000	94.6	0.87	0.6	7.0	1.8	7400
YKK5603-2	1400	2980	98.01	10000	94.8	0.87	0.6	7.0	1.8	7600
YKK5604-2	1600	2980	110.6	10000	94.9	0.88	0.6	7.0	1.8	7780
YKK5605-2	1800	2980	124.3	10000	95	0.88	0.6	7.0	1.8	7980
YKK5602-4	1250	1490	86.60	10000	94.7	0.88	0.7	7.0	1.8	7300
YKK5603-4	1400	1490	96.69	10000	95	0.88	0.7	7.0	1.8	7510
YKK5604-4	1600	1490	110.4	10000	95.1	0.88	0.7	7.0	1.8	7700
YKK5605-4	1800	1490	124.1	10000	95.2	0.88	0.7	7.0	1.8	7920
YKK5602-6	1000	990	71.96	10000	94.4	0.85	0.7	6.0	1.8	7700
YKK5603-6	1120	990	80.42	10000	94.6	0.85	0.7	6.0	1.8	8000
YKK5604-6	1250	990	88.62	10000	94.7	0.86	0.7	6.0	1.8	8240
YKK5605-6	1400	990	98.83	10000	95.1	0.86	0.7	6.0	1.8	8480
YKK5602-8	710	740	53.18	10000	94	0.82	0.7	6.0	1.8	7500
YKK5603-8	800	740	59.80	10000	94.2	0.82	0.7	6.0	1.8	7700
YKK5604-8	900	740	67.20	10000	94.3	0.82	0.7	6.0	1.8	7850
YKK5605-8	1000	740	75.43	10000	94.5	0.81	0.7	6.0	1.8	7990
YKK5602-10	560	590	44.62	10000	92.9	0.78	0.7	6.0	1.8	7500
YKK5603-10	630	590	50.09	10000	93.1	0.78	0.7	6.0	1.8	7700
YKK5604-10	710	590	56.33	10000	93.3	0.78	0.7	6.0	1.8	7860
YKK5605-10	800	590	63.13	10000	93.8	0.78	0.7	6.0	1.8	7990
YKK6301-2	2000	2980	137.8	10000	95.2	0.88	0.6	7.0	1.8	10500
YKK6303-2	2240	2980	154.1	10000	95.4	0.88	0.6	7.0	1.8	10900
YKK6305-2	2500	2980	171.9	10000	95.4	0.88	0.6	7.0	1.8	11600
YKK6301-4	2000	1490	137.5	10000	95.4	0.88	0.6	7.0	1.8	11500
YKK6303-4	2240	1490	153.9	10000	95.5	0.88	0.6	7.0	1.8	12000
YKK6305-4	2500	1490	171.8	10000	95.5	0.88	0.6	7.0	1.8	12450
YKK6301-6	1600	990	112.8	10000	95.2	0.86	0.6	6.0	1.8	13500
YKK6302-6	1800	990	126.8	10000	95.3	0.86	0.6	6.0	1.8	14800
YKK6303-6	2000	990	140.7	10000	95.4	0.86	0.6	6.0	1.8	15500
YKK6305-6	2240	990	157.6	10000	95.4	0.86	0.6	6.0	1.8	16000
YKK6302-8	1120	740	82.27	10000	94.7	0.83	0.7	6.0	1.8	10400
YKK6303-8	1250	740	91.72	10000	94.8	0.83	0.7	6.0	1.8	10710
YKK6304-6	1400	990	98.8	10000	95.1	0.86	0.6	6.0	1.8	10250
YKK6305-6	1600	990	112.8	10000	95.2	0.86	0.6	6.0	1.8	11250
YKK6301-10	900	590	69.10	10000	94	0.8	0.7	6.0	1.8	10500
YKK6302-10	1000	590	76.70	10000	94.1	0.8	0.7	6.0	1.8	11150
YKK6303-10	1120	590	85.81	10000	94.2	0.8	0.7	6.0	1.8	11890
YKK6304-10	1250	590	95.77	10000	94.2	0.8	0.7	6.0	1.8	12600
YKK6305-10	1400	590	107.1	10000	94.3	0.8	0.7	6.0	1.8	13250

注: 若有特殊要求, 可按用户需求提供。 Please contact us with your requirement.